


# IntelliShuttle®

Box Scrapers

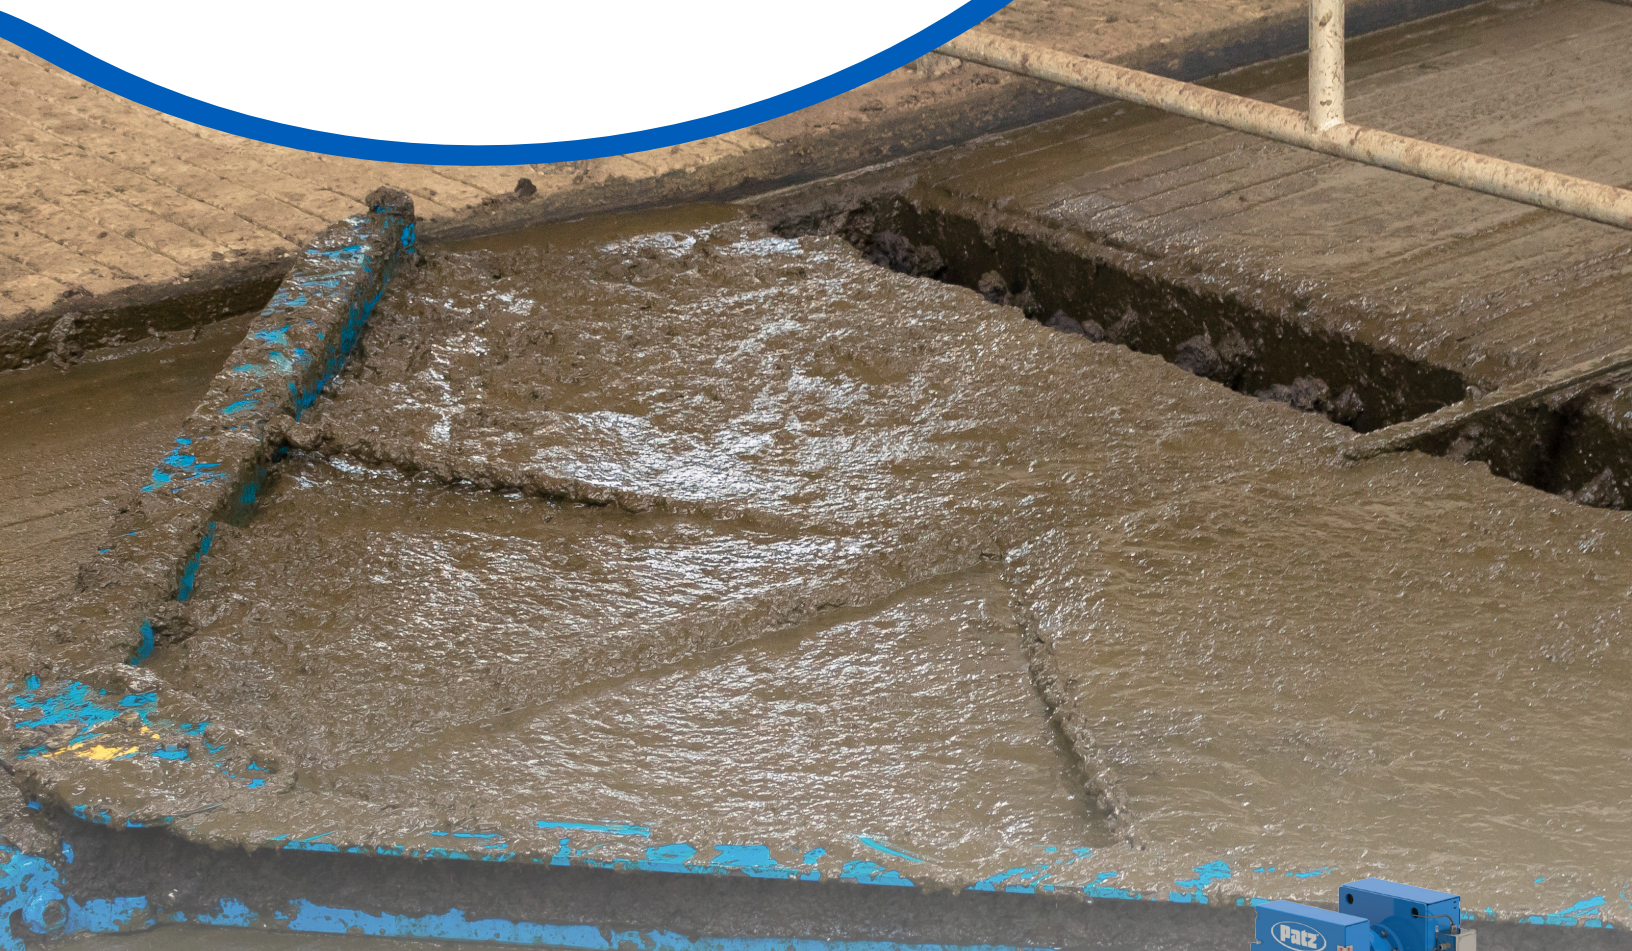

IntelliShuttle®  
CABLE  
Box Scraper

IntelliShuttle II  
CHAIN  
Box Scraper

**MANURE SOLUTIONS**  
www.patzcorp.com

**LET PATZ HANDLE YOUR MANURE  
SO YOU DON'T HAVE TO!**  
Work smarter. Not harder!

**INVESTMENT FLEXIBILITY**  
Ask Dealer for Financing Details

# IntelliShuttle® Box Scraper

## CABLE BOX SCRAPER



For slurry manure with chopped straw, sawdust or sand-laden bedding.

Features SmartSense® Expert Control Panel with easy-to-understand pictorial icons.

Drive unit design includes technology for precise scraper automation!


Shuttle box features AR400 (abrasion-resisting) steel bottom plates for longer life.

Mechanically activated swinging door.


Cross gutter:  
 Width: 36 inches (914 mm).  
 Depth: Minimum 34 inches (864 mm).

Customized to fit your operation with up to 5 shuttle boxes per drive unit.

End wheel is designed for mounting on end or can be adapted to side walls for easy removal and service.




Side Wall Mount Wheel



End Wall Mount Wheel

# IntelliShuttle® II Box Scraper

## CHAIN BOX SCRAPER

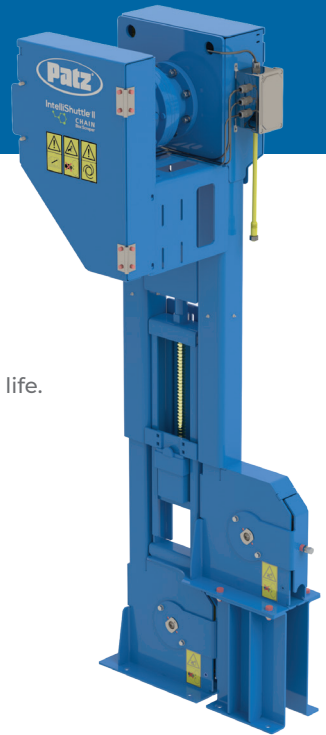

For slurry manure with chopped straw, sawdust or sand-laden bedding.

Features Sentinel Expert Control Panel with easy-to-understand pictorial icons.

Drive unit design includes technology for precise scraper automation!


Shuttle box features AR400 (abrasion-resisting) steel bottom plates for longer life.

Mechanically activated swinging door.


Cross gutter:  
 Width: 36 inches (914 mm).  
 Depth: Minimum 34 inches (864 mm).

Customized to fit your operation with up to 5 shuttle boxes per drive unit.

End wheel is designed for mounting on end or can be adapted to side walls for easy removal and service.



Chain Carrier



End Wall Mount Wheel


## SmartSense® EXPERT CONTROL PANEL

- Fiberglass enclosure.
- Easy-to-use, 4.3" (109 mm), color touch screen display.
- 3 operational modes: MANual, CONTInuous and AUTOMatic (schedule up to 12 cycles per day).
- Easy-to-understand pictorial icons.
- Easy-to-use, quick-connect electric cables with pre-wired junction box.
- Integrated LOCK-OUT/TAG-OUT power disconnect lever.
- Black plastic manual box included to protect Operator's and Parts Manuals from the environment.



## NEW! SENTINEL CONTROL PANEL

- Patz innovative "Learning System."
- Fiberglass NEMA enclosure with easy-to-use, quick-connect electric cables with pre-wired junction box.
- Glove-friendly, easy-to-use, 7" (178 mm) color HMI touch screen display.
- Large, easy-to-recognize universal language icon navigation.
- 3 operational modes: MANual, CONTInuous, and AUTOMatic (schedule up to 12 cycles per day).
- Adjustable speed control.
- "Auxiliary Relay Function" allows the operator to automatically start another machine, lights, or horns by supplying a start signal.

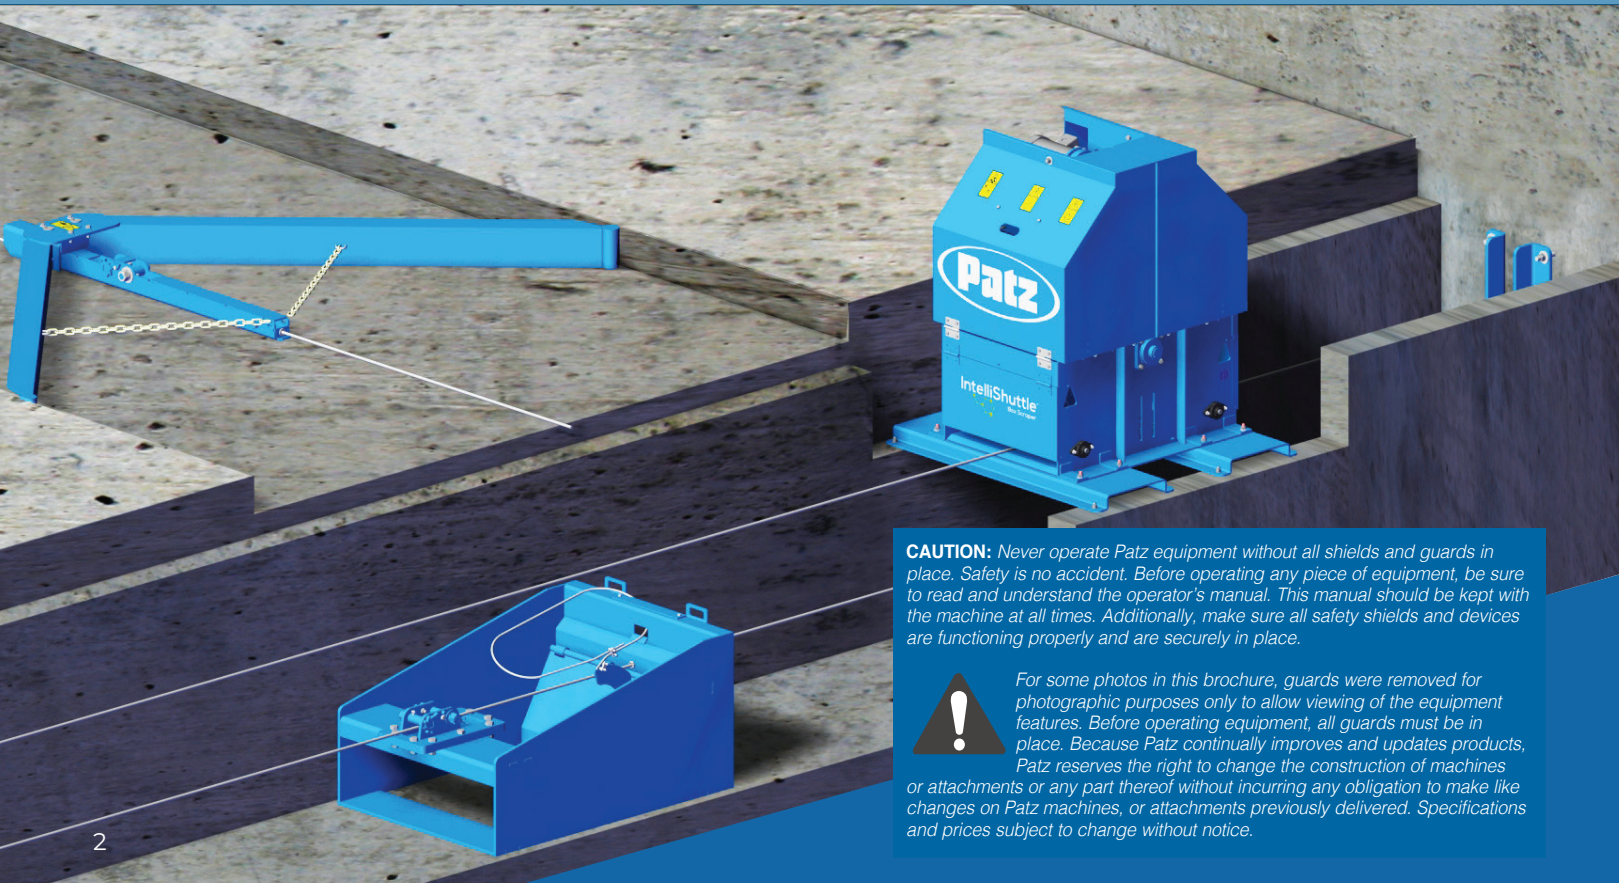

**CAUTION:** Never operate Patz equipment without all shields and guards in place. Safety is no accident. Before operating any piece of equipment, be sure to read and understand the operator's manual. This manual should be kept with the machine at all times. Additionally, make sure all safety shields and devices are functioning properly and are securely in place.

**!** For some photos in this brochure, guards were removed for photographic purposes only to allow viewing of the equipment features. Before operating equipment, all guards must be in place. Because Patz continually improves and updates products, Patz reserves the right to change the construction of machines or attachments or any part thereof without incurring any obligation to make like changes on Patz machines, or attachments previously delivered. Specifications and prices subject to change without notice.





Patz Corporation • Pound, Wisconsin USA  
Ph: (920) 897-2251 • [info@patzcorp.com](mailto:info@patzcorp.com) • [www.patzcorp.com](http://www.patzcorp.com)

